


HDMI 2.0 MATRIX SWITCH 4:4:4

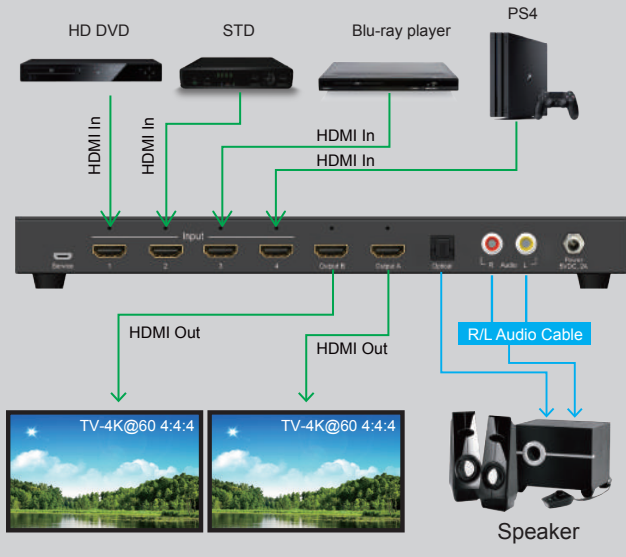

- 4-way MHL/HDMI dual-mode input, free switch output to two HDMI any one
- Any a hd signal source can be through the optical fiber separation or around a track to realize audio output independently
- Supports full hd, full 3 d, 4 k * 2 k
- Support the ARC function: in the HDTV directly receive audio and video content, the high-definition TV via HDMI audio directly sent to the A/V power amplifier on the receiver, without the other cable
- Separation can realize synchronous audio output, have PASS, 2.0 CH, 5.1 CH can choose three kinds of audio mode
- LED lamp, when the signal source or signal set working, corresponding will brighten lights
- Using standard AWG26 HDMI cable, the input transmission distance up to 10 meters, output transmission distance up to 15 meters
- The input can be through the infrared remote control switch, also can be directly through the button control
- LED status indicator, make the product each working condition be clear at a glance
- No signal loss
- Simple installation
- Outer 5 v / 2 a power adapter


Model Description

HM-SW401H	HDMI 4X1 SWITCHER WITH AUDIO EXTRACTION
HM-SW402H	HDMI 4X2 SWITCHER WITH AUDIO EXTRACTION

HM-SW401KPT 4X1 HDMI 4K2K SEAMLESS SWITCH WITH AUDIO




VIDEO WALL

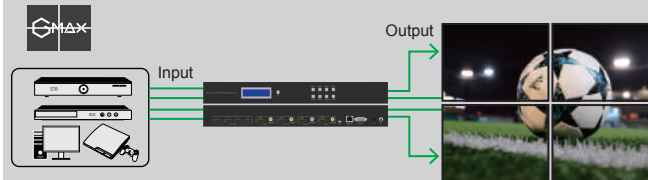


- One input port on the front panel is specialized for portable devices
- Multi-switching methods: intelligent, IR remote or by touch button
- Supports highest video resolution up to 4K2K .
- Supports 3.4Gbps per channel (10.2Gbps all channel) bandwidth.
- Supports 16bit per channel (48bit all channel) deep color.
- HDCP pass-through.
- Supports uncompressed audio such as LPCM.
- Supports compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD).
- Support 3D all format, including 1080p@48/23.98/24Hz, 720p@59.94/60Hz/50Hz, bandwidth up to 340MHz.

HM-MT404A HDMI 2.0 4X4 MATRIX SEAMLESS SWITCH WITH VIDEO WALL FUNCTION

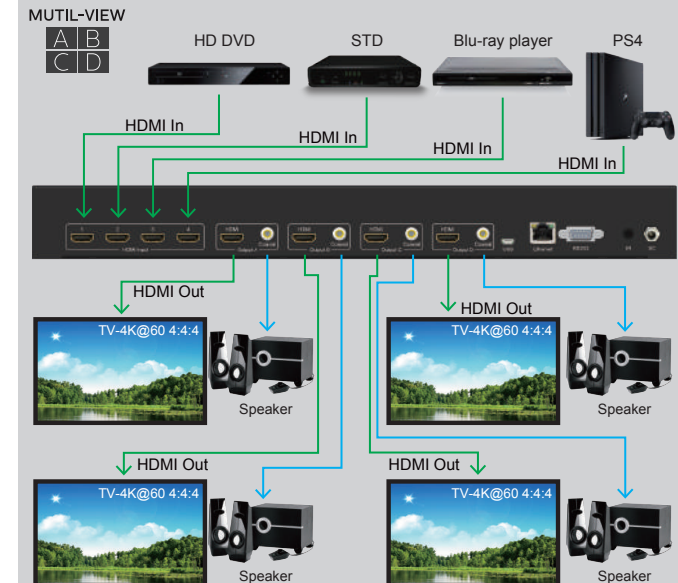


VIDEO WALL

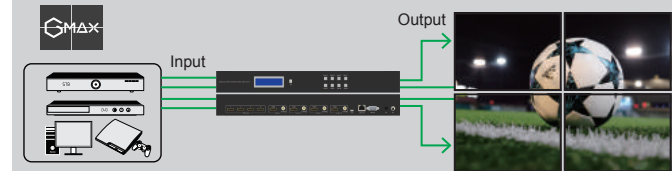

- HDMI 2.0(a/b)
- 18Gbps Bandwidth Support
- V4K60 4:4:4 Support
- Full HDR Support (HDR 10 & 12 Bit)
- Dolby Vision, HDR10+ and HLG Support
- HDCP 2.2 (and all earlier versions supported)
- 1080p > 4K & 4K > 1080p Up /Down Scalers on each output
- Advanced EDID Management
- IR, RS-232 and LAN Control Options
- Digital Toslink Out (7CH PCM, DD, DD+, DTS, DTS-MA)
- Balanced Analog Out (2CH PCM)
- Audio Delay for Digital & Analog Out
- HDBaseT Compatibility mode for mixed systems! (More below)

HM-SW401S

HDMI 4X1 QUAD MULTI-VIEWER WITH SEAMLESS SWITCHER

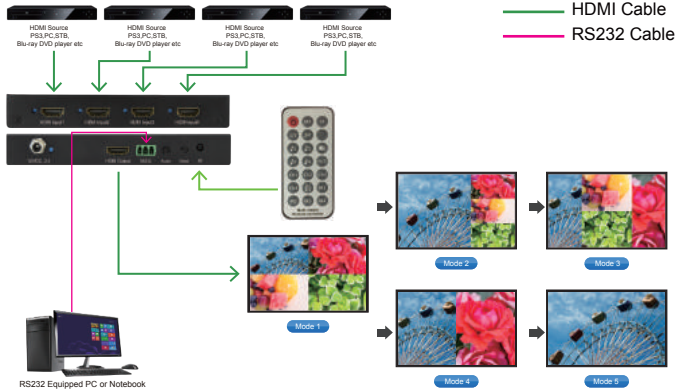


- Mode 1 :** The four HDMI input sources are displayed in 2x2 on one screen.
- Mode 2 :** The four HDMI input sources are displayed with one bigger and three smaller windows on one screen.
- Mode 3 :** The four HDMI input sources are displayed and H-split on one screen.
- Mode 4 :** The two HDMI input sources are displayed in 2x1 on one screen.
- Mode 5 :** This is the full screen mode, pressing IN1~IN4 button is to select the corresponding channel and displayed in full screen as a seamless switcher.

This HDMI 4X1 Switch is a high performance 4 by 1 Quad Multi-Viewer with seamless switcher. It supports four HDMI input sources to be displayed on one screen with five multiview mode. As a switcher, it can also seamlessly switch the four HDMI input freely. The product can be controlled by various ways, through the front panel button, IR, RS232 control etc.

- Compliant with HDMI 1.3a, HDCP 1.2
- Supports multiplexed HDMI 4-input and 1-output
- Supports up to 1080p60 High Definition resolution
- Support 4 by 1 Quad Multi-viewer and seamless switcher (with same resolution)
- Support button, IR control, RS232 control
- Support scaler up, scaler down function
- Support multi output resolution



PRESENTATION SWITCH HDMI 2.0 4:4:4

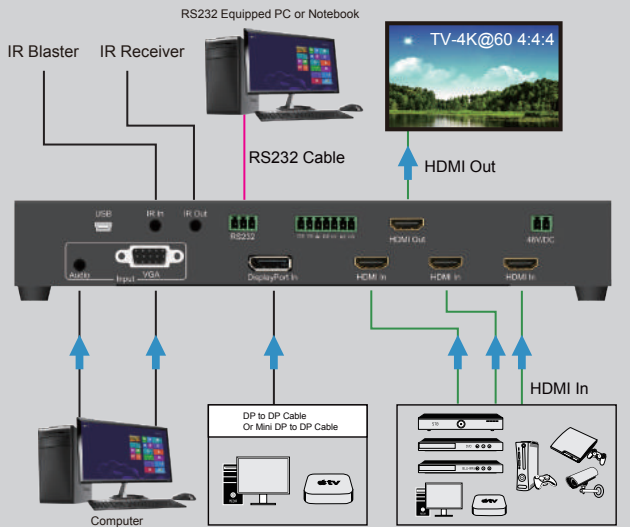

- DisplayPort & VGA Inputs
- HDMI Outputs
- 4K 30 4:4:4, 4K60 4:2:0 (HDMI input Only)
- HDR 4:2:2 12 Bit Support (HDMI input Only)
- HDCP 2.2 & Earlier Supported
- 100M (330ft) On 1080P, Up to 70m (230ft) on 4K (Cat6a) In
- 70M (230ft) On 1080P, 40M (131ft) on 4K (Cat6a) Out
- Fast Switching
- Analog audio extraction
- RS232 & IR Control projectors, AVR's
- Designed for the conference/classroom room so your customer can focus on their meetings, not their video system.

Model	Description
HM-VDH501	5X1 PRESENTATION SWITCH HDMI 2.0 4:4:4
HM-VDH502	MATRIX 5X2 PRESENTATION SWITCH HDMI 2.0 4:4:4

HDMI 2.0 4X4 MATRIX SWITCH 4:4:4

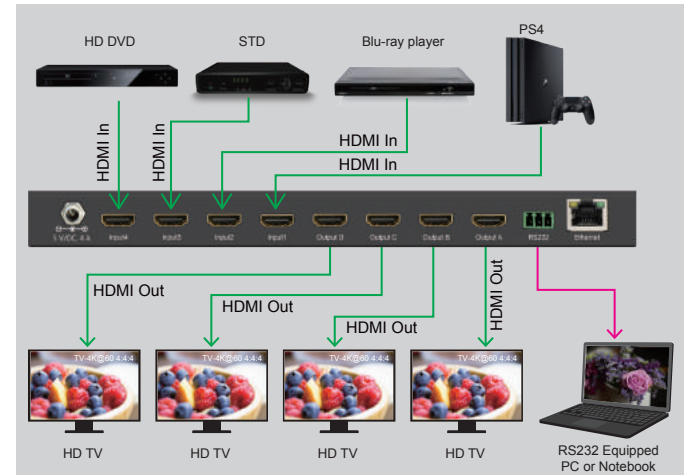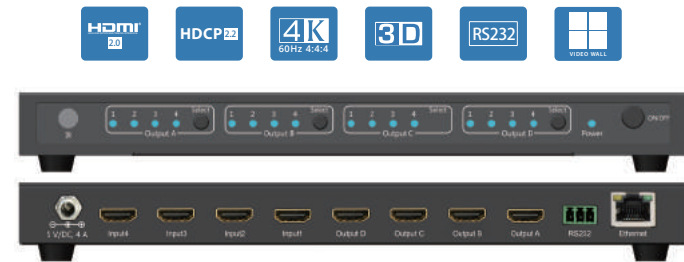

- Digital Distribution: 4 HDMI Source to 4 HDMI Displays
- 4K 30 4:4:4, 4K60 4:2:0 (HDMI input Only)
- HDR 4:2:2 12 Bit Support (HDMI input Only)
- HDCP 2.2 & Earlier Supported
- Fast Switching
- Analog audio extraction
- RS232 & IR Control
- Designed for the conference/classroom room so your customer can focus on their meetings, not their video system.

Model	Description
HM-MT404L	HDMI 2.0 4X4 MATRIX SWITCH 4:4:4 WITH ETHERNET
HM-MT404	HDMI 2.0 4X4 MATRIX SWITCH 4:4:4

G-MAX Technology Co., Ltd.
 东莞市捷懋电子有限公司

廣東省東莞市鳳崗鎮雁田布心精博工業園C1棟3樓
 3F, C1 Building, Jing Bo Industrial Park, Bu Xin, Yan Tian, Feng Gang Town,
 Dong Guan City, Guang Dong Province, China
 Tel : +86-769-82082789 82082786 82081166 82081199
 Fax : +86-769-87770599
 E-Mail: sales@gmaxtech.com www.gmaxtech.com